


911 address shall be a minimum 3" lettering marked on meter enclosure, pole, or durable material attached to pole and should be visible from street. (See sections 1-3, 3, 4)

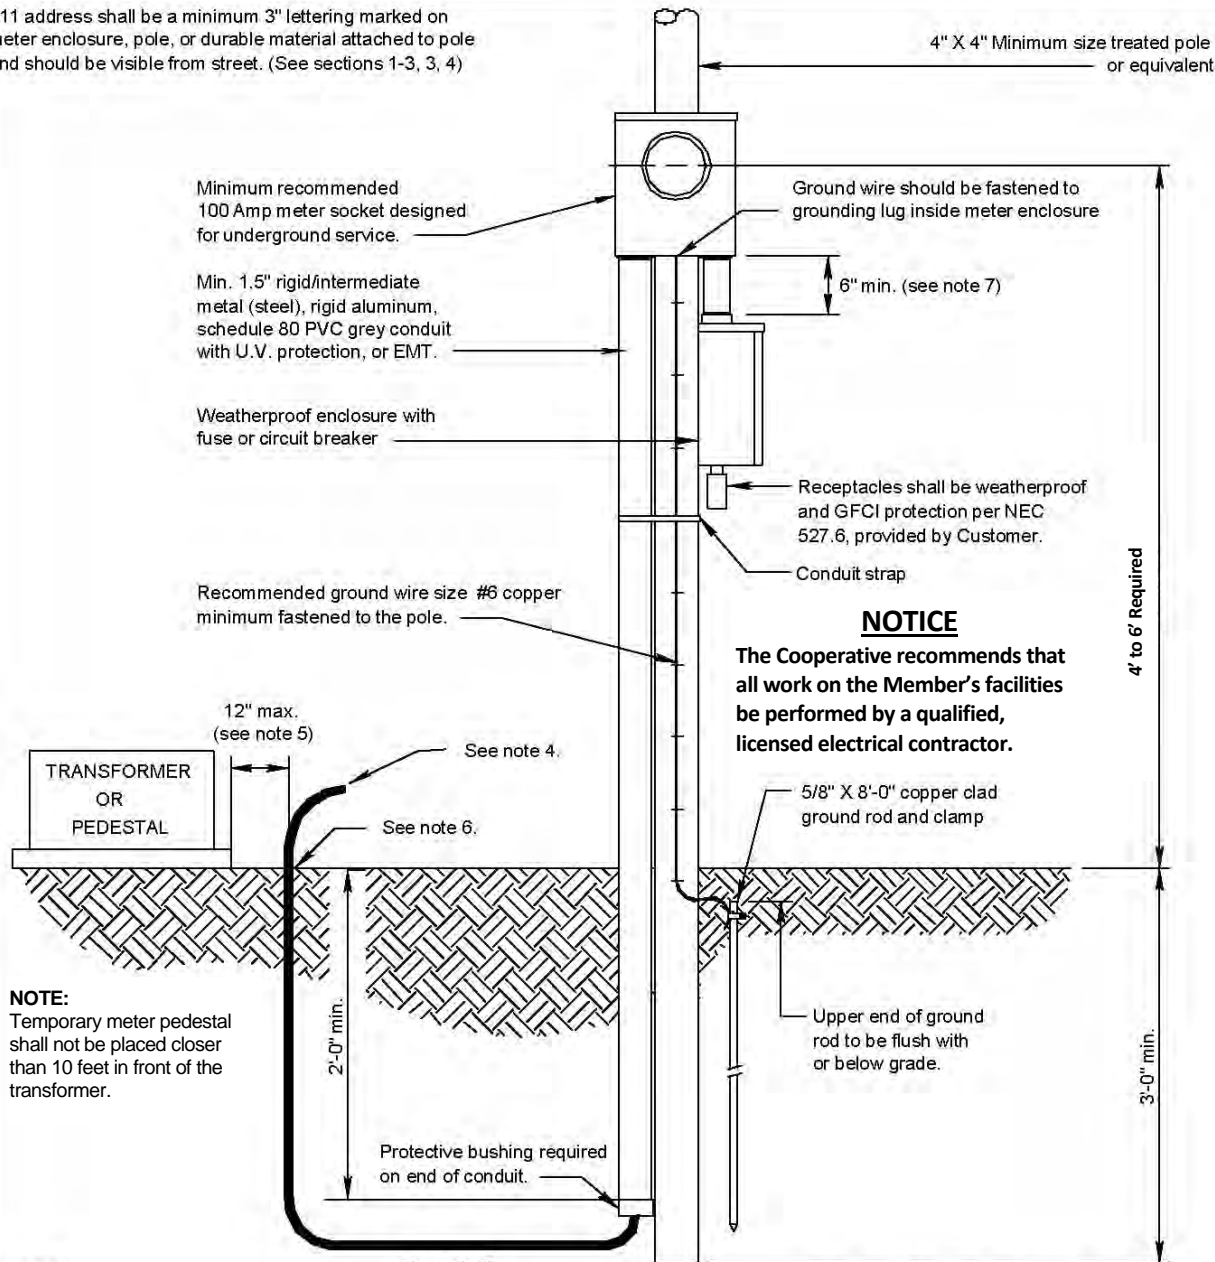

**NOTE:**  
Temporary meter pedestal shall not be placed closer than 10 feet in front of the transformer.

**NOTES:**

1. Member's facilities shall comply with Cooperative Standards, the National Electrical Code, and authorities having jurisdiction.
2. All conduit connections to be raintight.
3. Member provides minimum wire size of #6 copper or #4 aluminum, or as required by load.
4. Service wire suitable for direct bury to be furnished, installed, and maintained by the Member. Member shall provide enough wire to reach terminals inside transformer or pedestal.
5. Member to trench to within 12" of pedestal or transformer. Minimum depth of 24".
6. Wire location shall be visibly marked by Member prior to Cooperative energizing service.
7. If the conduit between the meter socket and main disconnect is not metal, a bonding jumper is required.

**CALL 48 HOURS BEFORE YOU DIG – Dial 811**  
It shall be the Member's responsibility to stay clear of all underground facilities.

**TEMPORARY SERVICE FROM AN UNDERGROUND SOURCE**

**DRAWING 4.5-2**

August 2010  
NOT TO SCALE

